



IT PDU Basic 1 U

With its IT PDU Basic 1 U, BACHMANN provides a huge choice of PDUs in a high-quality aluminium profile. With their extremely compact size of just 1 height unit, 44 mm in depth and 19" in width, the PDUs can be easily integrated into your IT rack.

Their multi-functional mounting brackets allow the units to be easily mounted in various ways (e.g. inwardly recessed). Our high quality standards ensure that the contact is reliable.

- Torsionally rigid 1 U aluminium profile, 19" format
- Up to 9x socket inserts in the 19" format
- Flexible positioning and universal attachment options
- The modular platform allows individual solutions to be project-planned

Versions available:

- Anodised profiles in black or grey
- End caps riveted or rewirable
- Earthing contact and IEC60320 sockets
- Various country versions
- Illuminated 2-pole switch
- Locking of IEC60320 plugs
- 3-way and 12-way variants (no 19" format)
- Type III 6.5KA overvoltage protection
- Mains and frequency filters
- Protection with micro fuse
- 30 mA residual current device
- Micro circuit breaker
- Master + Slave function
- Sockets set at 35°


19" IT PDU Basic (230V/50 Hz)

- Cable type: 2.0m H05VV-F 3G 1.50mm²
- Phase(s): 1
- Nominal voltage: 230V
- Current per phase: 16A

#	Plug	B16A miniature circuit breaker	RCD 30mA	Thermal fuse A	Switch	C13	with locking clips 940.103	C19	CEE 7/3	Outlets in total	Profile colour
333.401	CEE 7/7								9	9	grey
333.506	CEE 7/7								9	9	black
333.400	CEE 7/7				•				8	8	grey
333.505	CEE 7/7				•				8	8	black
333.539	CEE 7/7					9				9	grey
333.616	CEE 7/7					12	•			12	grey
333.815	C20							8		8	grey
800.2332	C20					8		3		11	grey
800.2333	C20							3	6	9	grey
333.416	Terminal								8	8	grey
333.830	Terminal					12				12	grey
With overvoltage protection											
333.404	CEE 7/7								8	8	grey
333.534	CEE 7/7								8	8	black
333.405	CEE 7/7				•				7	7	grey
333.535	CEE 7/7				•				7	7	black
With overvoltage protection Mains and frequency filters											
333.402	CEE 7/7								6	6	grey
333.536	CEE 7/7								6	6	black
333.403	CEE 7/7				•				5	5	grey
333.537	CEE 7/7				•				5	5	black
With mains and frequency filters											
333.406	CEE 7/7								7	7	grey
With fuse											
333.411	CEE 7/7		•						6	6	grey
333.412	CEE 7/7	•							6	6	grey
333.408	CEE 7/7			10		8				8	grey
800.2331	CEE 7/7			10		12	•			12	grey
333.410	C14			10					8	8	grey
333.538	C14			10					8	8	black
333.540	C14			10		8				8	grey
800.2284	C14			10		12	•			12	grey



For more 19" power strips >1 U, see from page 250.

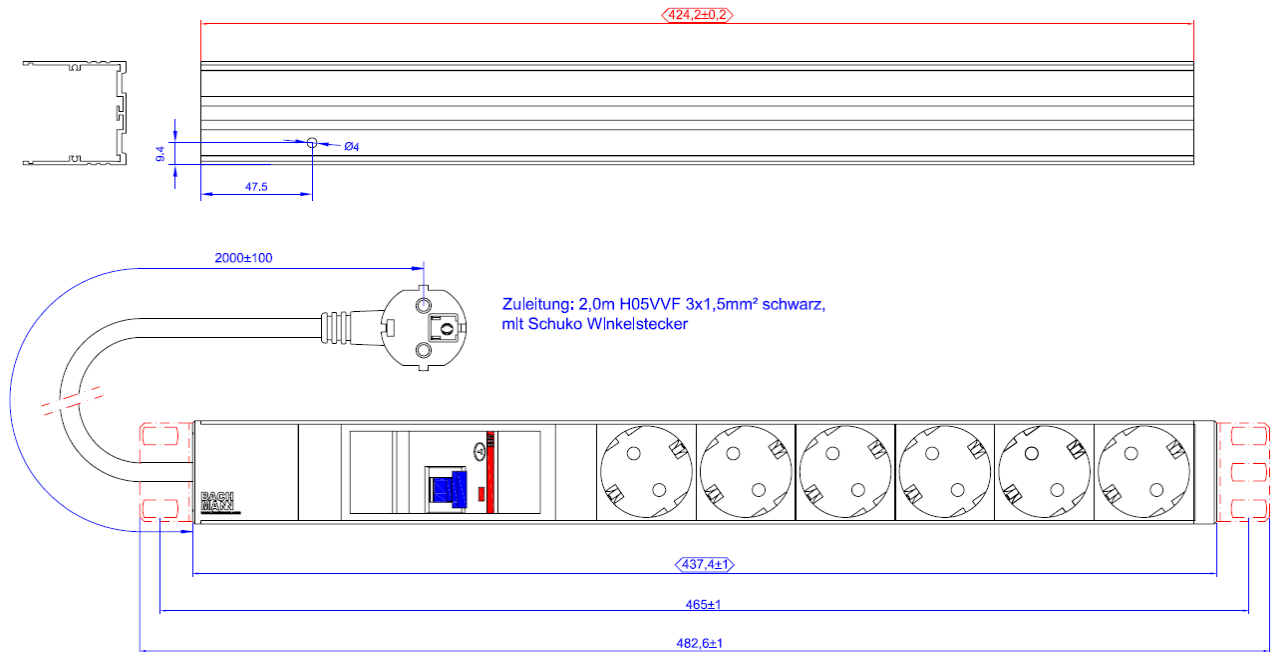

<p>19" Steckdosenleiste Alu 1HE</p> <p>Steckdosen:</p> <ul style="list-style-type: none"> • 6x Schutzkontaktsteckdosen • 2-polig mit Schutzkontakt • Farbe ähnlich RAL 7035, um 35° gedreht • 16A/3600W, AC250V, IP20 • nach DIN 49 440, gemäß: VDE0620-1 <p>Anschluss:</p> <ul style="list-style-type: none"> • 2,0m H05VV-F3G1,50mm², schwarz • wiederanschließbar; Endstücke geschraubt, Innenverdrahtung mit Euroklemme <p>Profil:</p> <ul style="list-style-type: none"> • 1HE, ALU, eloxiert <p>Kunststoff:</p> <ul style="list-style-type: none"> • Farbe ähnlich RAL7035, PA6 GF 30 V1, Glühdraht-Prüfung bis 850°C; <p>Haltewinkel:</p> <ul style="list-style-type: none"> • Stahlblech • Montage in 90° - Schritten möglich; <p>FI - Schutzschalter:</p> <ul style="list-style-type: none"> • 250V, 25A • Ansprechstrom 30mA; Ansprechzeit 30ms <p>Verpackung:</p> <ul style="list-style-type: none"> • Bachmann Polybeutel • mit Bachmann Art.-Nr. und Barcode 13 <p>Lieferumfang:</p> <ul style="list-style-type: none"> • 1 x 19" Steckdosenleiste Alu 1HE • 2 x 19" Befestigungswinkel (lose beigelegt) 	<p>19" Socket strip ALU 1U</p> <p>Sockets:</p> <ul style="list-style-type: none"> • 6x Socket outlets with earthing contact • 2-pole with earthing contact • Colour similar to RAL 7035, set at 35° • 16A/3600W, AC250V, IP20 • DIN 49 440, according to: VDE0620-1 <p>Connection:</p> <ul style="list-style-type: none"> • 2,0m H05VV-F3G1,50mm², black • rewireable, endcaps screwed, inside wiring with euro terminal <p>Profile:</p> <ul style="list-style-type: none"> • 1HE, ALU, anodised <p>Plastic material:</p> <ul style="list-style-type: none"> • Colour similar to RAL7035, PA6 GF 30 V1, Glow wire resistant up to 850° C <p>Mounting brackets:</p> <ul style="list-style-type: none"> • Steel sheet • For mounting in 4 positions, each 90° <p>FI – residual current circuit breaker:</p> <ul style="list-style-type: none"> • 250V, 25A • 30mA, 30mS <p>Packaging:</p> <ul style="list-style-type: none"> • polybag with Bachmann print • With Bachmann Item no. and barcode 13 <p>Scope of delivery:</p> <ul style="list-style-type: none"> • 1 x 19" Socket strip Alu 1U • 2 x 19" mounting metal flanges (enclosed separately)
--	--